

Atlas Copco Stationary air compressors

GX 2-5C Pack and Full Feature series

2-5 kW / 3-7.5 hp oil injected rotary screw compressors



SILENT POWER
SIMPLE RELIABILITY

Atlas Copco

GX2-5C: Industrial technology for the workshop.

Atlas Copco screw compressors have always set the standard for reliability and performance in the compressed air industry.

With the new **GX2-5C**, Atlas Copco brings the power and reliability of an industrial screw compressor to small industry.

Traditionally, light industry has had to settle for inefficient and noisy piston compressors. The new **GX2-5C** delivers **Silent Power** and **Simple Reliability**.

The advanced sound dampening of these units insures **Silent Power**. The sound level of the complete package is only 61 to 64 dB(A).

Simple Reliability is insured as Atlas Copco screw compressors are suitable for **100% continuous duty**. Additionally, the number of components has been kept to a minimum so simplicity is designed in from the start.


Complete compressed air installation

- ❑ The GX2-5C is delivered with all of the components required for a complete installation.
- ❑ The package has been designed to be as complete as possible.
- ❑ The compressor is receiver mounted and prepiped.
- ❑ All air connections have been optimized to minimize pressure drop and reduce the potential for air leaks.



Reduced power consumption

- ❑ The GX offers the low energy consumption and high efficiency of a rotary screw compressor.
- ❑ The standard start/stop control insures that the compressor is only consuming power when compressed air is needed.

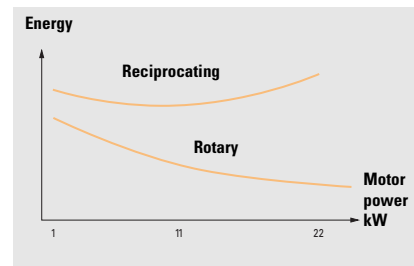

Simple and quick maintenance

- ❑ Service points are grouped together and accessible through the removable front panel.
- ❑ Spin-on separator and filter for quick maintenance.
- ❑ Continuous oil level display.



SILENT POWER

- The GX2-5C is supplied with a full sound enclosure, which reduces the sound to a level of just 61 dB(A).
- Rotary screw technology minimizes vibration.
- Shaft mounted low noise fan for silent operation.

25 dB	whispering
45 dB	refrigerator
60 dB	normal conversation
61 dB	GX 2 compressor
65 dB	air conditioner
70 dB	office environment
85 dB	heavy traffic



SIMPLE RELIABILITY

- Rugged screw compressor technology allows for 100% continuous duty cycle.
- Directly driven cooling fan for increased dependability.
- All oil lines are rigid pipe or high temperature hose. No plastic oil tubing used.
- All electrical wiring is done with heavy-duty cable and high quality connectors.
- The basic package includes the main switch with integrated circuit breaker to protect the compressor.
- Low operating temperature insures long life and eliminates the need for an after-cooler.



Quality air. Clean, dry air saves you time and money.

When the air that surrounds us is compressed, the water vapor and pollution in the air will be concentrated in the compressed air. Unless this water and pollution is removed, it will be carried into your compressed air system where it can damage your piping, compressed air tools and machinery as well contaminate your end products.

Full Feature air dryer

- ❑ The GX2-5C is available with a built-in refrigerant air dryer. A refrigerant air dryer cools the compressed air and removes water vapor before it can enter your compressed air network. This prevents rust in your compressed air piping and avoids damage to your air tools or equipment.



PDx high efficiency air filter

- ❑ All oil lubricated compressors expose your compressed air to oil vapors. These oil vapors, combined with atmospheric pollutants, can create an abrasive oil sludge. The best way to protect your tools and machinery is to install an in line PDx coalescing and particulate air filter, standard with the Full Feature model.



Electronic receiver drain

- ❑ Compressed air receivers always require periodic drainage to remove any condensate that may accumulate. With the electronic drain option, this operation is handled automatically and efficiently.



Technical data

Compressor type	Working pressure		Capacity FAD ⁽¹⁾			Motor power		Noise level ⁽²⁾ dB(A)	Weight ⁽³⁾	
	bar(e)	psig	l/s	m ³ /h	cfm	kW	hp		Pack lbs.	FF
60 Hz version										
GX 2	10.3	150	4.0	14.4	8.5	2.2	3.0	61	364	441
GX 4	10.3	150	7.8	28.2	16.6	4.0	5.5	62	364	441
GX 5C	10.3	150	10.0	36.0	21.2	5.5	7.5	64	364	441

(1) Unit performance measured according to ISO 1217, Ed. 3 Annex C-1996


(2) Pack and Full Feature mean noise level measured according to Pneurop/Cagi PN8NTC2 test code; tolerance 2 dB(A).

(3) With air receiver of 60 gallon

Standard options	GX Pack	GX Full Feature
Refrigerated air dryer	-	included
PDx filter kit	-	included
Dryer transformer kit	-	option
Electronic receiver drain	option	option



Flow chart

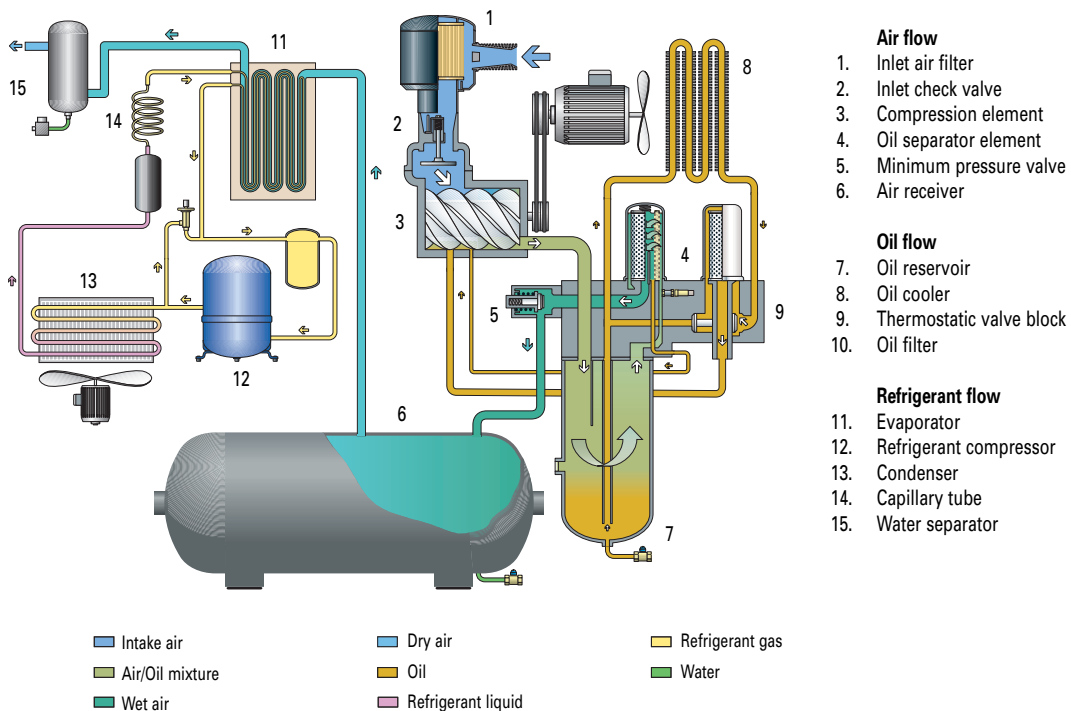



The face of interaction

What sets Atlas Copco apart? Our belief that, to excel, we must provide the best possible know-how and technology in ways that our customers value. Whether we're fully supporting existing products or advancing technology through innovation, we constantly focus on customer needs.

The Atlas Copco way of doing business grows from ongoing interaction, long-term relationships, and a commitment to understanding each customer's process and objectives. As a result, every compressed air solution we create helps a customer operate with greater efficiency, economy, and productivity.

Satisfying customer needs effectively has made Atlas Copco the number one compressor manufacturer in the world. We will continue to attract new business through our unwavering conviction to creating products and ideas that help our customers succeed.



Danger: Compressed air should never be supplied as breathing air unless air is properly purified for breathing. Atlas Copco assumes no responsibility or liability related to the purchaser's/user's breathing air system.

The information contained herein is general in nature and is not intended for specific construction, installation or application purposes



Atlas Copco Compressors Inc.
161 Lower Westfield Road
Holyoke, MA 01040
Tel. 413-536-0600 Fax. 413-536-0091
www.atlascopco.com